
### **Attachment-5: Proposed Zoning**

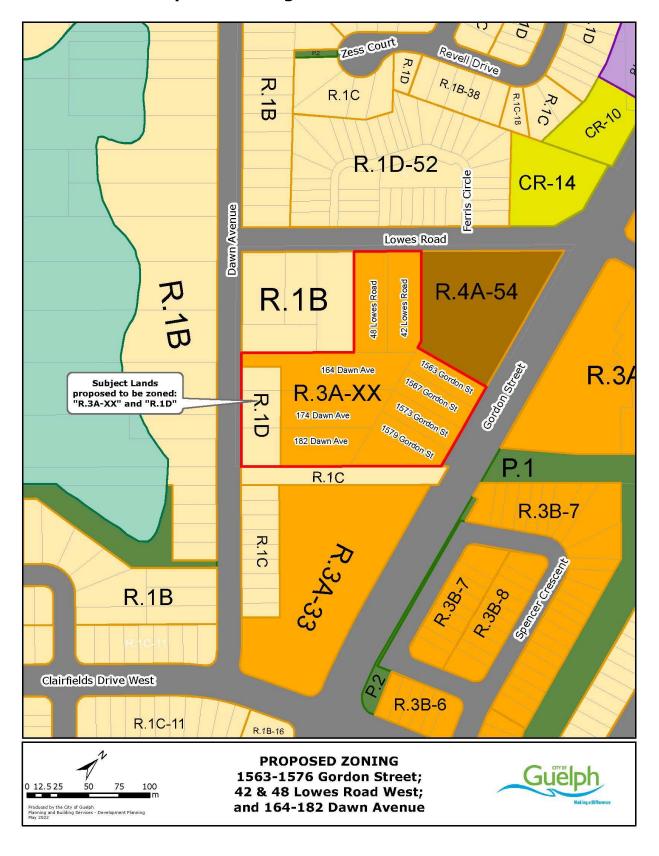

		5-1
		SECTION 5 - RESIDENTIAL ZONES
	5.1	RESIDENTIAL SINGLE DETACHED (R.1) ZONES)
	5.1.1	PERMITTED USES The following are permitted Uses within the R.1A, R.1B, R.1C, and R.1D Zones:
18116		<ul> <li>Single Detached Dwelling</li> <li>Accessory Apartment in accordance with Section 4.15.1</li> <li>Bed and Breakfast establishment in accordance with Section 4.27</li> <li>Day Care Centre in accordance with Section 4.26</li> <li>Group Home in accordance with Section 4.25</li> <li>Home Occupation in accordance with Section 4.19</li> <li>Lodging House Type 1 in accordance with Section 4.25</li> </ul>
	5.1.2	REGULATIONS Within the Residential 1 (R.1) <b>Zones</b> , no land shall be <b>Used</b> and no <b>Building</b> or <b>Structure</b> shall be erected or <b>Used</b> except in conformity with the applicable regulations contained in Section 4 - General Provisions, the regulations listed in Table 5.1.2, and the following:
15378	5.1.2.1	Despite Row 7 of Table 5.1.2, where a <i>Garage, Carport</i> or <i>Parking Space</i> is not provided in accordance with Section 4.13.2.1, one <i>Side Yard</i> shall have a minimum dimension of 3 metres.
15006	5.1.2.2	Despite any required <b>Side Yard</b> on a residential <b>Lot</b> , <b>Carports</b> shall be permitted provided that no part of such <b>Carport</b> is located closer than 0.6 metres to any <b>Side Lot Line</b> .
20134	5.1.2.3	In the event that there is a transformer easement on a particular <b>Lot</b> , portions of the <b>Single Detached Dwelling</b> may be required to be <b>Setback</b> further than specified in Row 6 of Table 5.1.2 in order that a minimum separation of 3 metres may be maintained between the transformer easement and any part of the dwelling.
	5.1.2.4	Despite Rows 6 and 8 of Table 5.1.2, <b>Buildings</b> or <b>Structures</b> located on <b>Through Lots</b> shall have a <b>Setback</b> the same as the nearest adjacent <b>Main Building</b> and in accordance with Section 4.24.
	5.1.2.5	Despite Row 4 of Table 5.1.2, the minimum <i>Lot Frontage</i> for a <i>Corner Lot</i> in a R.1D <i>Zone</i> shall be 12 metres.
15006	5.1.2.6	Despite Row 4 of Table 5.1.2, the <i>Lots</i> located within Defined Area Map Number 66 of Schedule "A" of this <i>By-law</i> shall have a minimum <i>Lot Frontage</i> of the average <i>Lot Frontage</i> established by the existing

5-2

Lots within the same City Block Face, but in no case less than 9 metres. Nothing in this section shall require the minimum Lot Frontage to be greater than the minimum Lot Frontage established in Table 5.1.2. Where the average Lot Frontage of the existing Lots on the Block Face cannot be determined, the minimum Lot Frontage shall be as indicated in Table 5.1.2.

15006 5.1.2.7

Despite Row 6 of Table 5.1.2, the minimum *Front* or *Exterior Side Yard* for dwellings located within Defined Area Map Number 66 of Schedule "A" of this *By-law*, shall be:

- 15006 15378 17187 19691
- The minimum Front Yard or Exterior Side Yard shall be 6 metres or the average of the Setbacks of the adjacent properties. Where the offstreet Parking Space is located within a Garage or Carport, the Setback for the Garage or Carport shall be a minimum of 6 metres from the Street Line.
- ii) In accordance with Section 4.6 and 5.1.2.3; and
- In accordance with the <u>Ontario Building Code</u>, as amended from time to time or any successor thereof, regulations for above ground electrical conductor clearances to *Buildings*.

Where a road widening is required in accordance with Section 4.24, the calculation of the required *Front* or *Exterior Side Yard* shall be as set out in Section 5.1.2.7, provided that the required *Front* or *Exterior Side Yard* is not less than the new *Street Line* established by the required road widening.

15006 5.1.2.8

Despite Row 7 of Table 5.1.2, properties **Zoned** R.1B or R.1C with **Buildings** over 2 **Storeys** located within Defined Area Map Number 66 of Schedule "A" of this **By-law** shall have a minimum **Side Yard** requirement of 1.5 metres.

5.1.2.9

Deleted.

15692 5.1.2.10

Despite Row 7 of Table 5.1.2 in the R.1A Zone, where a **Building** has a one **Storey** portion and a 1.5 to 2 **Storey** portion, the required **Side Yard** shall be 1.5m from the **Side Lot Line** to the foundation wall of the 1 **Storey** portion and 2.4m from the **Side Lot Line** to the wall of the 1.5 to 2 **Storey** portion.

17187 18116 5.1.2.11 Where **Lots** have less than 12 metres of **Frontage**, the **Garage** is limited to a maximum of 55% of the **Lot** width (as measured at the **Front Yard Setback**).

5-3

15006, 15378, 17187, 18116, 19063, 19691 TABLE 5.1.2 - REGULATIONS GOVERNING R.1 ZONES

	7187, 18116, 19063, 19691 TABLE 5.1.2 - REGULATIONS GOVERNING R.1 ZONES					
1	Residential Type	SINGLE-DETACHED DWELLINGS				
2	Zones	R.1A	R.1B	R.1C	R.1D	
3	Minimum Lot Area	555 m <sup>2</sup>	460 m <sup>2</sup>	370 m <sup>2</sup>	275 m <sup>2</sup>	
4	Minimum Lot Frontage	18 metres and in accordance with Section 5.1.2.6.	15 metres and in accordance with Section 5.1.2.6.	12 metres and in accordance with Section 5.1.2.6.	9 metres and in accordance with Sections 5.1.2.5 and 5.1.2.6.	
5	Maximum Building Height	3 Storeys and in accorda	ance with Section	4.18.		
6	Minimum Front Yard	6 metres and in accordance with Sections 4.6, 4.24, 5.1.2.3, 5.1.2.4 and 5.1.2.7.				
6a	Minimum Exterior Side Yard	4.5 metres and in accord and 5.1.2.7.	ance with Section	ns 4.6, 4.24, 4.28,	5.1.2.3, 5.1.2.4	
7	Minimum Side Yard 1 to 2 Storeys Over 2 Storeys	1.5 metres 2.4 metres and in accordance with Sections 5.1.2.1 and 5.1.2.2.	1.5 metres 2.4 metres and in accordance with Sections 5.1.2.8, 5.1.2.1 and 5.1.2.2.	1.2 metres 1.2 metres and in accordance with Sections 5.1.2.8, 5.1.2.1 and 5.1.2.2.	0.6 metres and in accordance with Sections 5.1.2.1 and 5.1.2.2.	
8	Minimum Rear Yard	7.5 metres or 20% of the <i>Lot Depth</i> , whichever is less and in accordance with Section 5.1.2.4.				
9	Accessory Buildings or Structures	In accordance with Section 4.5.				
10	Fences	In accordance with Sec	tion 4.20.			
11	Off-Street Parking	In accordance with Section 4.13.				
12	Minimum Landscaped Open Space	The Front Yard on any Lot, excepting the Driveway (Residential) shall be landscaped and no parking shall be permitted within this Landscaped Open Space. Despite the definition of Landscaped Open Space, a minimum area of 0.5 metres between the Driveway (Residential) and nearest Lot Line must be maintained as landscaped space in the form of grass, flowers, trees, shrubbery, natural vegetation and indigenous species.				
13	Garbage, Refuse and Storage	In accordance with Section 4.9.				
14	Garages	For those <i>Lots</i> located within the boundaries indicated on Defined Area Map Number 66, attached <i>Garages</i> shall not project beyond the main front wall of the <i>Building</i> . Where a roofed porch is provided, the <i>Garage</i> may be located ahead of the front wall of the dwelling (enclosing <i>Habitable Floor Space</i> on the first floor) equal to the projection of the porch to a maximum of 2 metres.				

	5.3	RESIDENTIAL TOWNHOUSE (R.3) ZONES
	5.3.1	PERMITTED USES The following are permitted Uses within the Residential Townhouse R.3 Zone:
15692	5.3.1.1	R.3A – Cluster Townhouse Zone
		<ul> <li>Maisonette dwelling</li> <li>Stacked Townhouse</li> <li>Cluster Townhouse</li> <li>Home Occupation in accordance with Section 4.19</li> <li>Accessory Use in accordance with Section 4.23</li> </ul>
15692	5.3.1.2	R.3B - On-Street Townhouse Zone
		<ul> <li>On-Street Townhouse</li> <li>Home Occupation in accordance with Section 4.19</li> <li>Accessory Use in accordance with Section 4.23</li> </ul>
	5.3.2	REGULATIONS
		Within the Residential <b>Townhouse</b> R.3 <b>Zones</b> , no land shall be <b>Used</b> and no <b>Building</b> or <b>Structure</b> shall be erected or <b>Used</b> except in conformity with the applicable regulations contained in Section 4 - General Provisions, the regulations set out in Table 5.3.2, and the following:
	5.3.2.1	Maximum Building Coverage
20134		Despite Row 8 of Table 5.3.2, in an R.3A, <i>Cluster Townhouse Zone</i> , where one <i>Parking Space</i> per unit is provided underground or <i>Garages</i> are attached or designed as an integral part of the dwelling units, the maximum coverage for the <i>Buildings</i> shall be 40 per cent.
	5.3.2.2	Minimum Side and Rear Yards - R.3A Zones
	5.3.2.2.1	No <b>Building</b> shall be located closer to any <b>Rear</b> or <b>Side Lot Line</b> than a distance equal to one-half the <b>Building Height</b> , and in no case less than 3 metres from any <b>Rear</b> or <b>Side Lot Line</b> .
	5.3.2.2.2	Deleted by <b>By-law</b> (2010)-19063

	5-10				
	5.3.2.3	Minimum Distance Between Buildings and Private Amenity Areas			
		R.3A <b>Zones</b>			
20134	5.3.2.3.1	The distance between the front, exterior side and rear face of one <b>Building</b> and the front, exterior side and rear face of another <b>Building</b> , each of which contains windows to <b>Habitable Rooms</b> shall in no case be less than 15 metres.			
19063	5.3.2.3.2	Deleted by <i>By-law</i> (2010)-19063			
17187 20134	5.3.2.3.3	The distance between the interior <b>Side Yard</b> of any two <b>Buildings</b> on the same <b>Lot</b> shall in no case be less than 3 metres.			
19063	5.3.2.3.4	No part of a <b>Private Amenity Area</b> shall be located within 10.5 metres of a wall in another <b>Building</b> containing windows of <b>Habitable Rooms</b> which face the <b>Private Amenity Area</b> .			
17187	5.3.2.3.5	The minimum distance between the <i>Private Amenity Areas</i> of two separate <i>Buildings</i> shall be 6 metres where one <i>Private Amenity Area</i> faces any part of the other <i>Private Amenity Area</i> or 3 metres where the <i>Private Amenity Areas</i> are side by side and aligned parallel to each other. The minimum distance between a <i>Private Amenity Area</i> and the wall of another <i>Building</i> shall be 6 metres.			
	5.3.2.4	Minimum Common Amenity Area - R.3A Zone			
	5.3.2.4.1	a) Except for developments which contain less than 20 dwellings, a minimum of 5 m² of Amenity Area per dwelling shall be provided and be developed as Common Amenity Area. This Common Amenity Area shall be aggregated into areas of not less than 50 m².			
		b) Despite Section 5.3.2.4.1 a), the following shall apply to Stacked Townhouse developments:			
		i) Except for developments which contain less than 20 dwellings, a minimum of 10 m² of Amenity Area per dwelling shall be provided and be developed as Common Amenity Area, and be aggregated into areas of not less than 50 m².			
		c) Where combined Cluster and Stacked Townhouses occur, the Common Amenity Area for the site shall be calculated by using			

	5-11
5.3.2.4.2	Amenity Areas shall be designed and located so that the length does not exceed 4 times the width.
5.3.2.4.3	A <b>Common Amenity Area</b> shall be located in any <b>Yard</b> other than the required <b>Front Yard</b> or required <b>Exterior Side Yard</b> .
5.3.2.4.4	Landscaped Open Space areas, Building rooftops, patios and above ground decks may be included as part of the Common Amenity Area if recreational facilities are provided and maintained (e.g. swimming pools, tennis courts, lounges and landscaped areas).
5.3.2.5	Minimum Private Amenity Area Per Dwelling Unit
5.3.2.5.1	R.3A <b>Zone</b> - <b>Cluster Townhouses</b> and Ground Level <b>Stacked</b> <u>Townhouse Units</u>
	A Private Amenity Area shall be provided for each unit and it shall:
17187 19063	<ul> <li>a) have a minimum area of 20 m²;</li> <li>b) have a minimum depth (from the wall of the dwelling unit) of 4.5 metres;</li> <li>c) have a minimum width equal to the width of the unit when the layout of the unit permits. If the preceding cannot be accomplished, the minimum width of the <i>Private Amenity Area</i> shall be 4.5 metres;</li> <li>d) not form part of a required <i>Front</i> or <i>Exterior Side Yard</i>;</li> <li>e) not face onto a public <i>Street</i>;</li> <li>f) be accessed through a doorway to a hall or <i>Habitable Room</i>, other than a bedroom;</li> <li>g) be separate and not include walkways, play areas, or any other communal area; and</li> <li>h) be defined by a wall or <i>Fence</i>.</li> <li>i) to be a minimum distance of 3.0 metres from a side or rear <i>Lot Line</i>.</li> </ul>
5.3.2.5.2	Despite Section 5.3.2.5.1, for <b>Stacked Townhouse</b> units above grade, each <b>Private Amenity Area</b> shall:
	<ul> <li>a) have a minimum area of 10 m<sup>2</sup>;</li> <li>b) consist of a patio or terrace; and</li> <li>c) be defined by a wall or railing between adjacent units to a height of 1.8 metres.</li> </ul>
5.3.2.5.3	For both <i>Cluster</i> and <i>Stacked Townhouse</i> developments, <i>Private Amenity Areas</i> shall be screened in a manner which prevents viewing into a part of it from any adjacent areas to a height of 1.8 metres. The extent of screening may be reduced if such screening would impair a beneficial outward and open orientation of view and

5-12

there is not adverse effect on the privacy of the Private Amenity

#### 5.3.2.6 Maximum Density of Site

5.3.2.6.2

5.3.2.6.3

The maximum density of Cluster Townhouse developments shall 5.3.2.6.1 be 37.5 dwellings per hectare.

> The maximum density for Stacked Townhouse Developments shall be 60 dwellings per hectare. This shall be increased by 1 dwelling per hectare for every 6 required resident Parking Spaces and associated manoeuvring aisles which are provided underground, up to a maximum density of 75 dwellings per hectare.

> For Townhouse developments which consist of a mix of Stacked and Cluster Townhouses, the densities shall be determined separately for blocks on the property.

#### 15006 5.3.2.7 Additional Front and Exterior Side Yard Regulations

Despite Row 5 of Table 5.3.2, for R.3 blocks not located on **Streets** listed in Section 4.24 and located within the boundaries of Defined Area Map Number 66 of Schedule "A" of this By-law, the Front or Exterior Side Yard shall be the average of the existing Yards within the same City Block Face and where the average of the existing Yards within the same City Block Face cannot be determined, the minimum Front or Exterior Side Yard shall be as set out in Row 5 of Table 5.3.2. Where legal off-street Parking Spaces are provided within an enclosed Structure, a minimum vehicular access of 6 metres between the Street Line and Structure shall be provided. In addition, location of units within this Defined Area shall be subject to the provisions of a Sight Line Triangle in Section 4.6.2.

Where a road widening is required in accordance with Section 4.24, the calculation of Front or Exterior Side Yards shall be as set out in Section 5.3.2.7, provided that the **Yard** is not less than the new **Street** Line established by the required road widening.

17187 19691 5.3.2.8 Maximum Driveway Width R.3B Zone On-Street Townhouses

Maximum Driveway (Residential) Width of R.3B Zone On-Street Townhouses shall comply with 4.13.7.2.5.

5-13

17187, 19691	TABLE 5.3.2 -	REGULATIONS	GOVERNING R.	3 ZONES
--------------	---------------	-------------	--------------	---------

1/18/, 19	1ABLE 5.3.2 - REGULATIONS GO	VERNING N	JUNES	
Row 1	Residential Type	R.3A Zone Cluster Townhouse	R.3A Zone Stacked Townhouse	R.3B Zone On-Street- Townhouse
2	Minimum Lot Area	800 m <sup>2</sup>	1,000 m <sup>2</sup>	180 m²
3	Minimum Lot Area Per Dwelling Unit	270 m <sup>2</sup>	150 m <sup>2</sup>	180 m <sup>2</sup>
4	Minimum Lot Frontage	18 metres	18 metres	6 metres
5	Minimum Front Yard	6 metres and as set out in Section 4.24 and 5.3.2.7.		
5a	Minimum Exterior Side Yard	4.5 metres and in accordance with Sections 4.24, 4.28 and 5.3.2.7		
6	Minimum Side Yard	See Section 5.3.2.2.		1.5m from the side of the <i>Building</i> .
7	Minimum Rear Yard	See Section 5	3.2.2.	7.5 metres
8	Maximum Building Coverage (% of Lot Area)	30	40	50
9	Maximum Building Height	3 Storeys and in accordance with Sections 4.16 and 4.18.		
10	Minimum Distance Between Buildings	See Section 5.3.2.3		
11	Minimum Common Amenity Area	See Section 5.3.2.4		
12	Minimum Private Amenity Area	See Section 5.3.2.5		
13	Minimum Landscaped Open Space (% of Lot Area)	40	40	35
14	Buffer Strip	Where an R.3 Zone abuts any other Residential Zone or any Institutional, Park, Wetland, or Urban Reserve Zone a Buffer Strip shall be provided. Buffer strips may be located in a required Side or Rear Yard.		
15	Fences	In accordance with Section 4.20.		
16	Off-Street Parking	In accordance with Section 4.13.		
17	Accessory Buildings or Structures	In accordance with Section 4.5.		
18	Maximum Number of <i>Dwelling Units</i> in a Row	12. Despite the preceding, where units are adjacent to a public Street, the maximum number of Dwelling Units in a row shall be 8.		8
19	Garbage, Refuse Storage and Composters	In accordance with Section 4.9.		
20	Maximum Density of Site	See Section 5.3.2.6		
21	Maximum Driveway (Residential) width R.3B Zone On-Street Townhouses			See Section 4.13.7.2.5

### Specialized R.3A-XX (Residential Cluster Townhouse) Zone

### Regulations

In accordance with Section 4 (General Provisions) and Section 5.3 and Table 5.3.2 (Regulations Governing R.3 Zones) of Zoning By-law (1995)-14864, as amended, with the following exceptions:

- To permit a maximum density of 83 units per hectare, whereas net density is limited to a maximum 60 units per hectare;
- To permit a minimum lot area of 120 square metres per dwelling unit, whereas a minimum 150 square metres is required;
- To permit a minimum lot frontage (Dawn Avenue) of 11 metres, whereas a minimum 18 metres is required;
- To permit a maximum building height of 3.5 storeys (14.5 m), whereas building height is limited to a maximum 3 storeys;
- To permit a minimum private amenity area of 9 square metres per unit; whereas a minimum 10 square metres per unit is required;
- To permit a maximum of 32 dwelling units in a row, whereas 12 units in a row is permitted; and
- A severability clause to ensure the site specific policies above continue to apply after future subdivision of the lands through a plan of condominium and/or severance.